
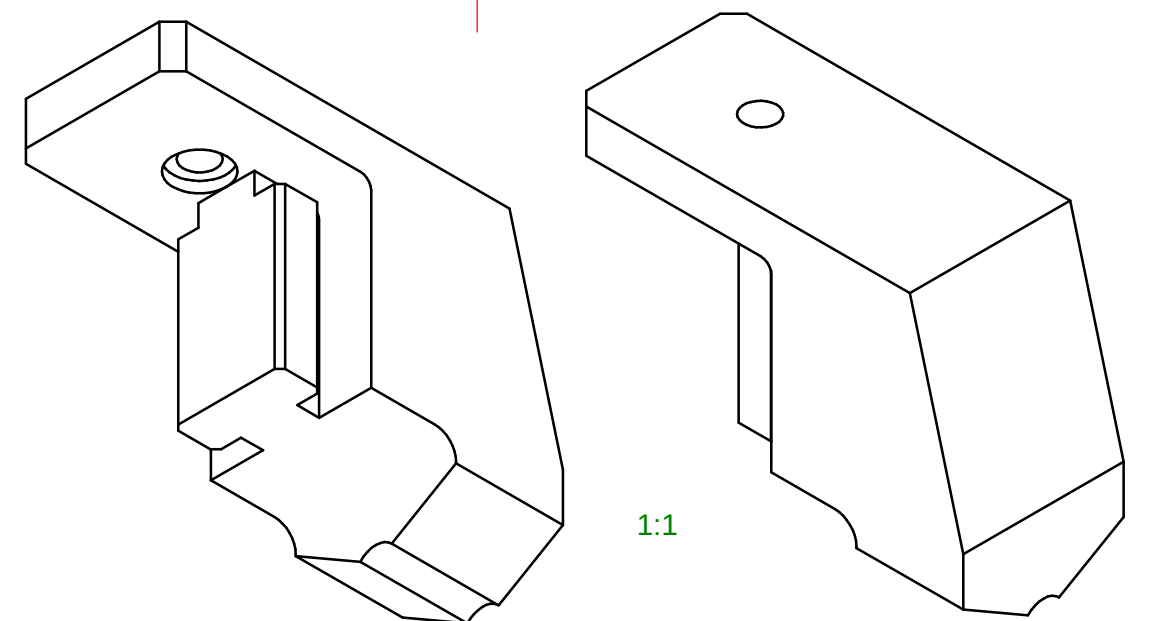
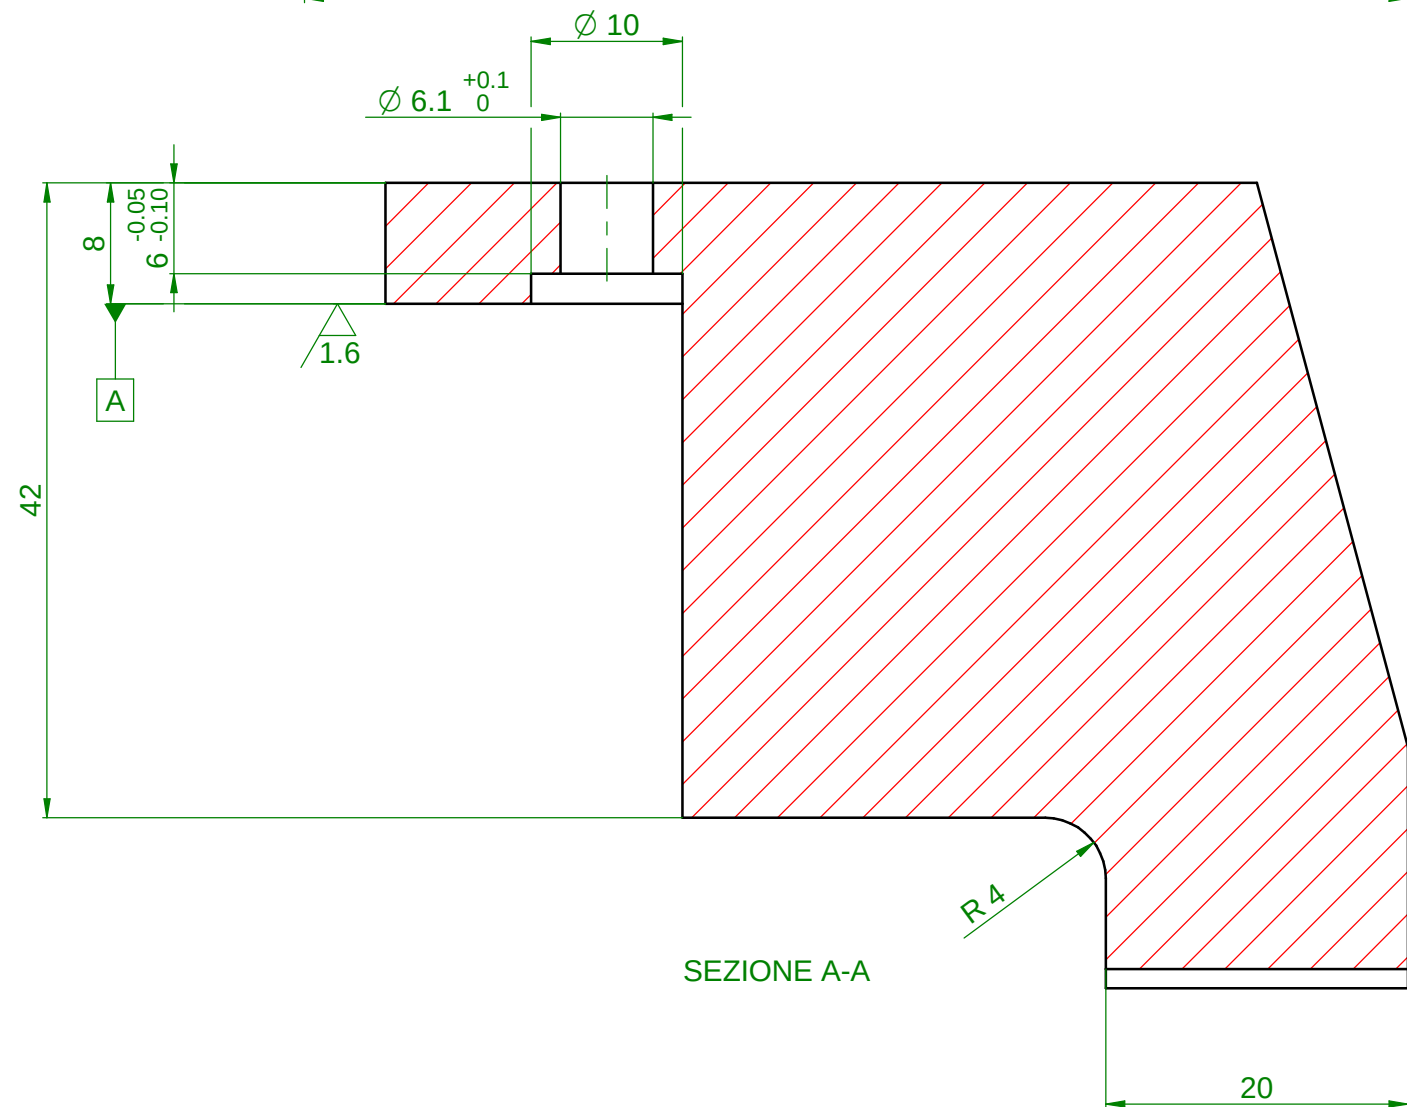
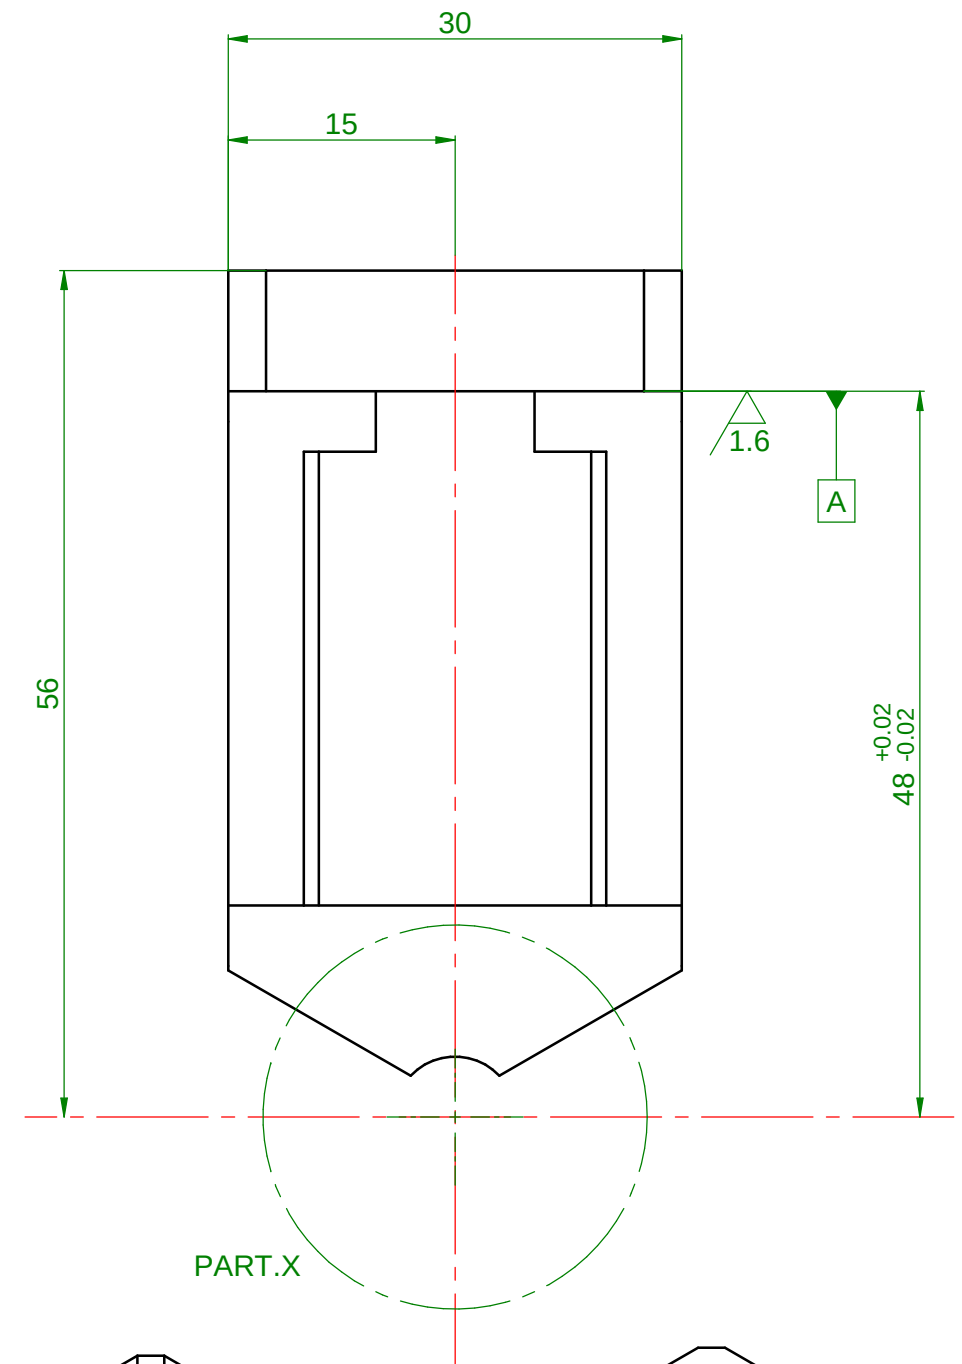
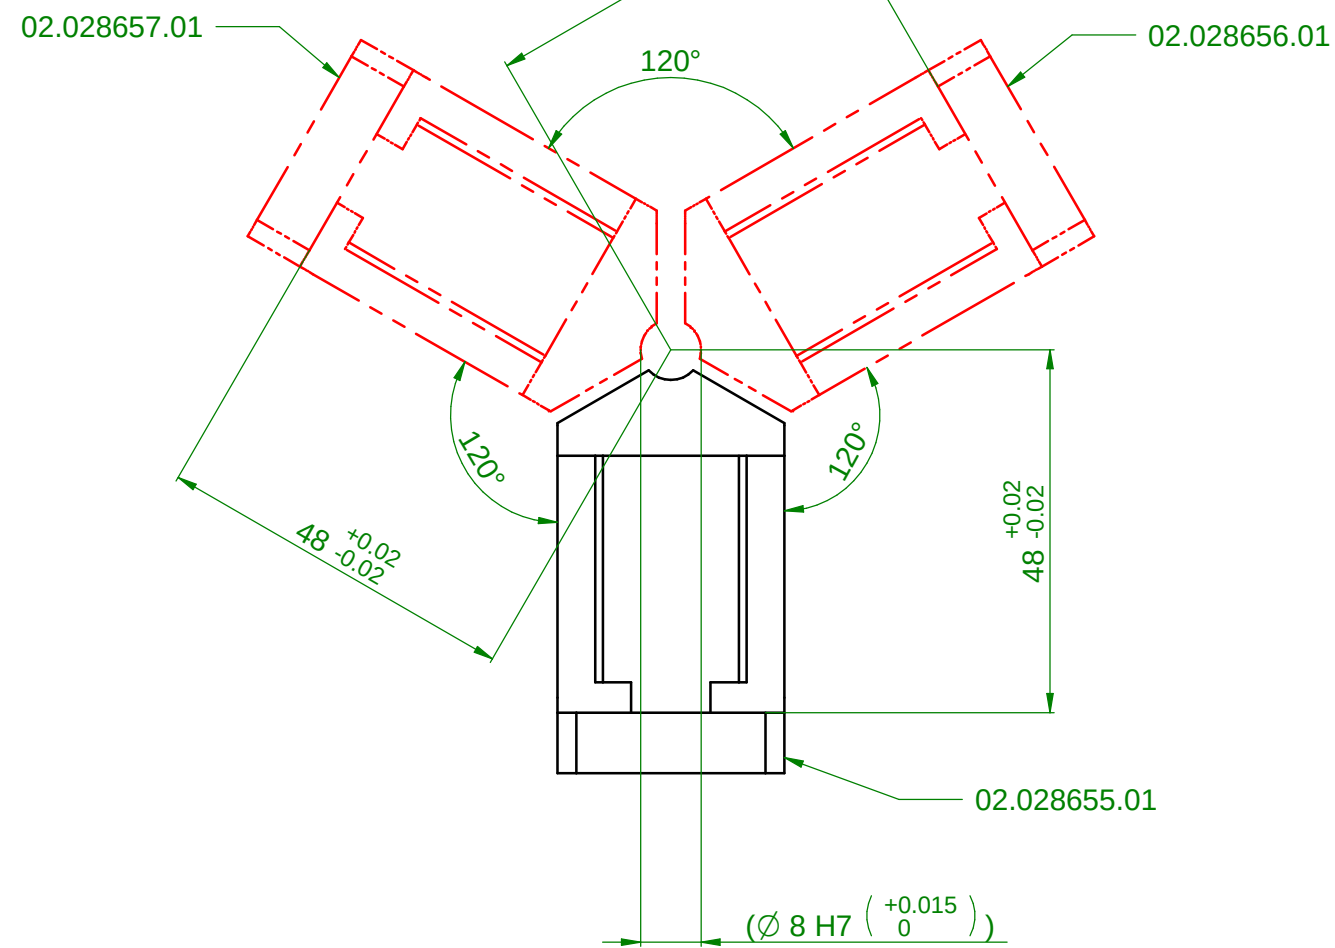
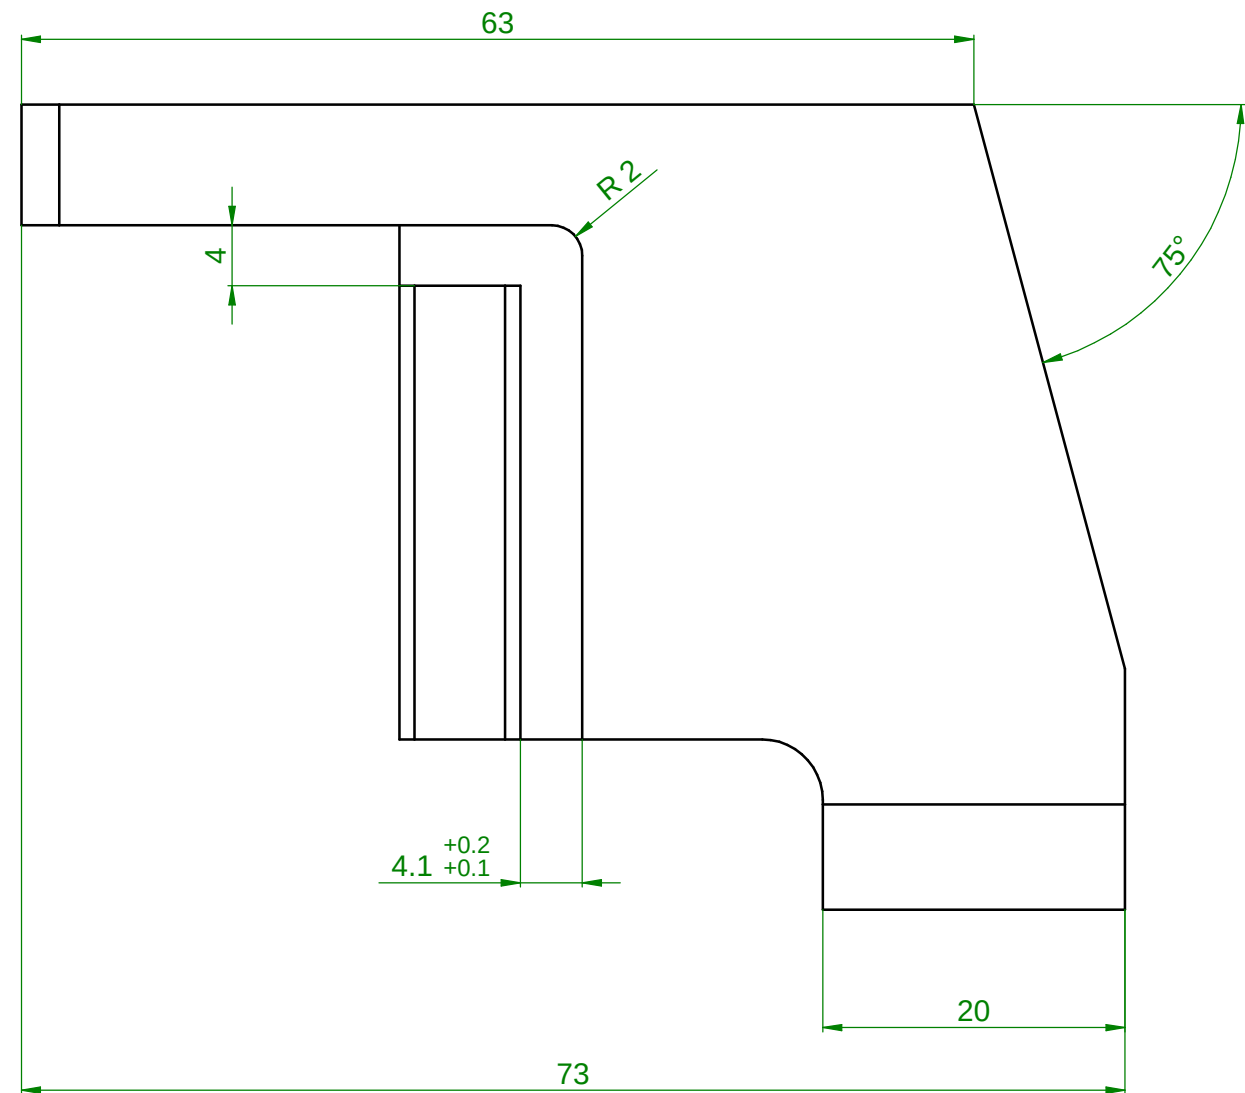
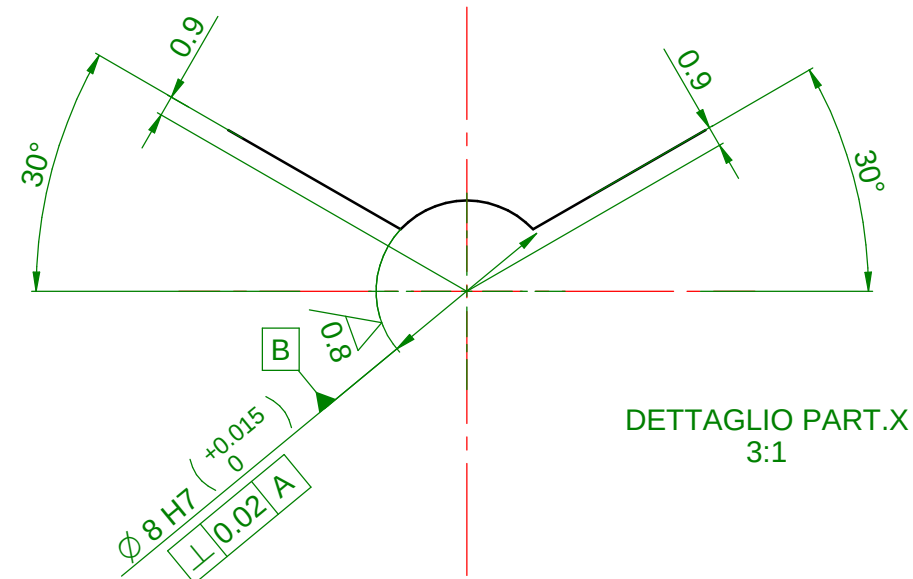


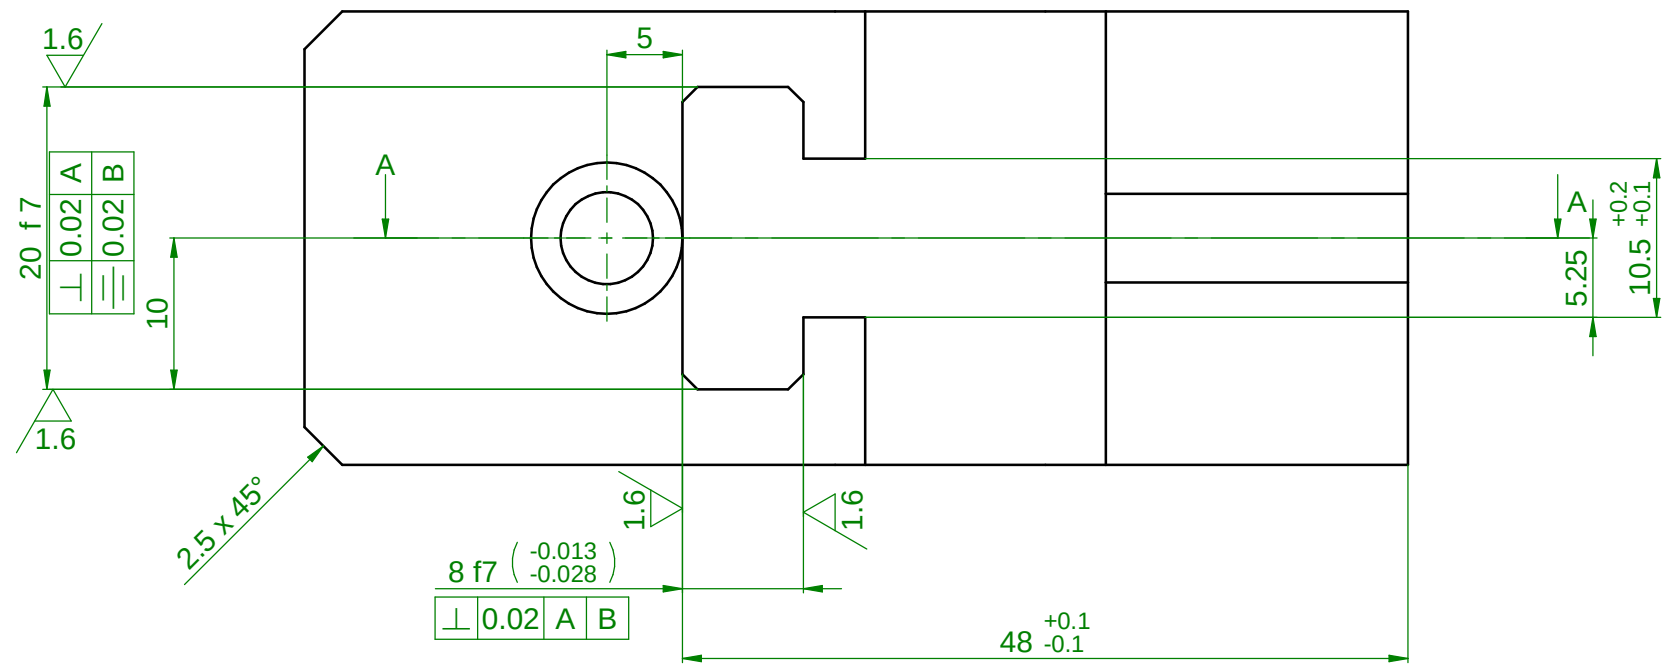

Eseguire la lavorazione a $\varnothing 8$ H7 unitamente ai particolari 02.028656.01 e 02.028657.01 posizionando le 3 griffe a 120° e rispettando le tolleranze indicate

SMUSSARE GLI SPIGOLI 0.3x45° $\sqrt{3.2} / (\sqrt{1.6} / \sqrt{0.8})$

						Material: X 210 Cr 13 KU UNI2955	Name: GRIFFA INFERIORE Øalbero=8			SHT: 1 OF: 1
						Heat Treatment: TEMPRA S.V. + RINVENIMENTO HRC 56-58	Drw: MARCHI	Date: 10/05/17	Scale: 2:1	Mass: 0.466 kg
						Mod: MARCHI	Date: 10/05/17			
REV	DATE	DESCRIPTION		DR	APP	Additive Finish:	Chk: -	Date: -	02.028655.01	
Model Filename: 0202865501.par Draw Filename: 0202865501.dft						General Tolerances:		Linear Geometrical	UNI EN 22768/1-m UNI EN 22768/2-K	A2
Il presente documento contiene INFORMAZIONI CONFIDENZIALI di ATOP S.p.A., ai termini di legge ogni diritto è riservato. This document contains CONFIDENTIAL INFORMATION of ATOP S.p.A. All rights are reserved.										