
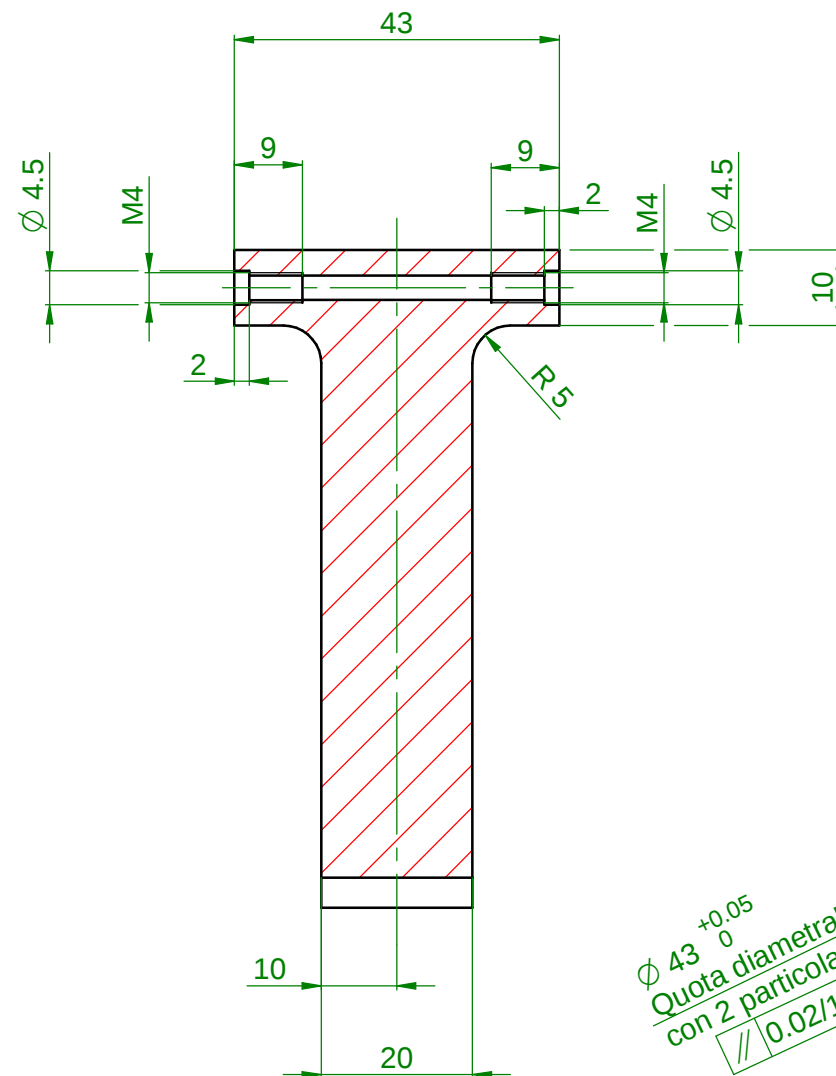
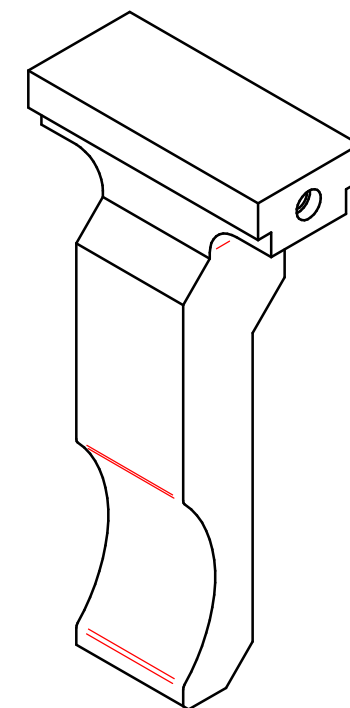




$\varnothing 43^{+0.05}_0$
Quota diametrale da lavorare
con 2 particolari accoppiati

//	0.02/100	A	B
----	----------	---	---


$$\frac{3.2}{\nabla} \left(\frac{1.6}{\nabla} \right)$$

.	.	.	.	.	Material: X 210 Cr 13 KU UNI2955	Name: GRIFFA CARICO/SCARICO Ø=43			SHT: 1		
.	.	.	.	.							
.	.	.	.	.							
.	.	.	.	.							
REV	DATE	DESCRIPTION	DR	APP	Heat Treatment: TEMPRA S.V. + RINVENIMENTO HRC 56-58	Drw: MARCHI	Date: 05/10/21	Scale: 1:1	Mass: 0.201 kg	03.079464.01	OF: 1
Model Filename: 0307946401.par Draw Filename: 0307946401.dft					Additive Finish:	Mod: MARCHI	Date: 05/10/21				
Il presente documento contiene INFORMAZIONI CONFIDENZIALI di ATOP S.p.A., ai termini di legge ogni diritto è riservato. This document contains CONFIDENTIAL INFORMATION of ATOP S.p.A. All rights are reserved.						Chk: -	Date: -	A3			
						General tolerances for linear dimensions: UNI EN 22768/1-m General tolerances for form and position: UNI EN 22768/2-K					