

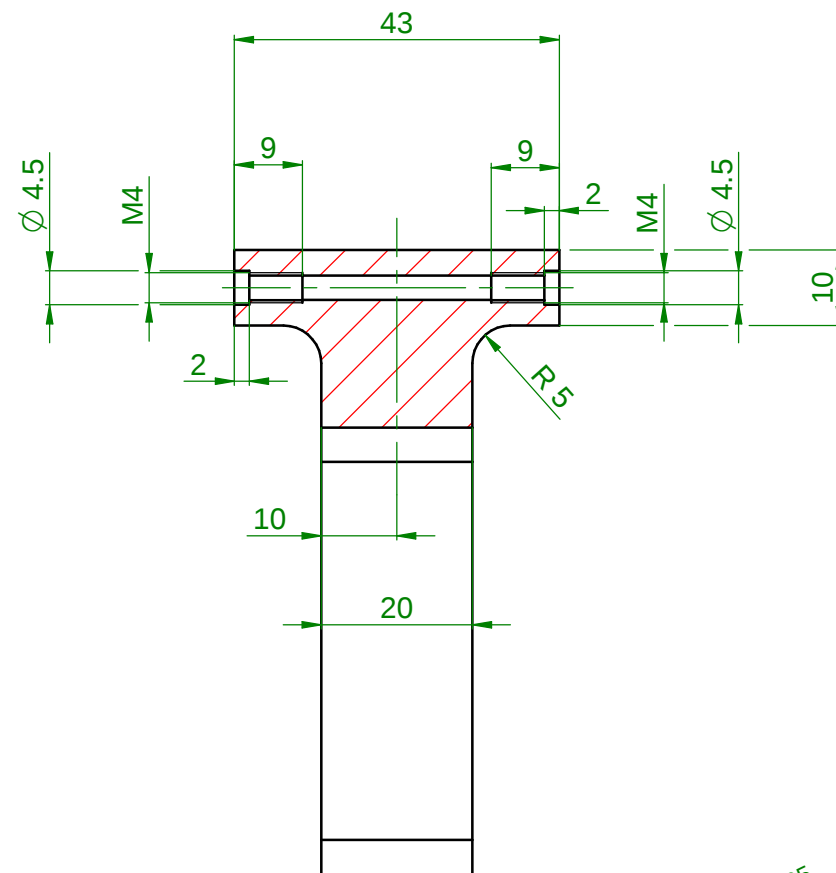
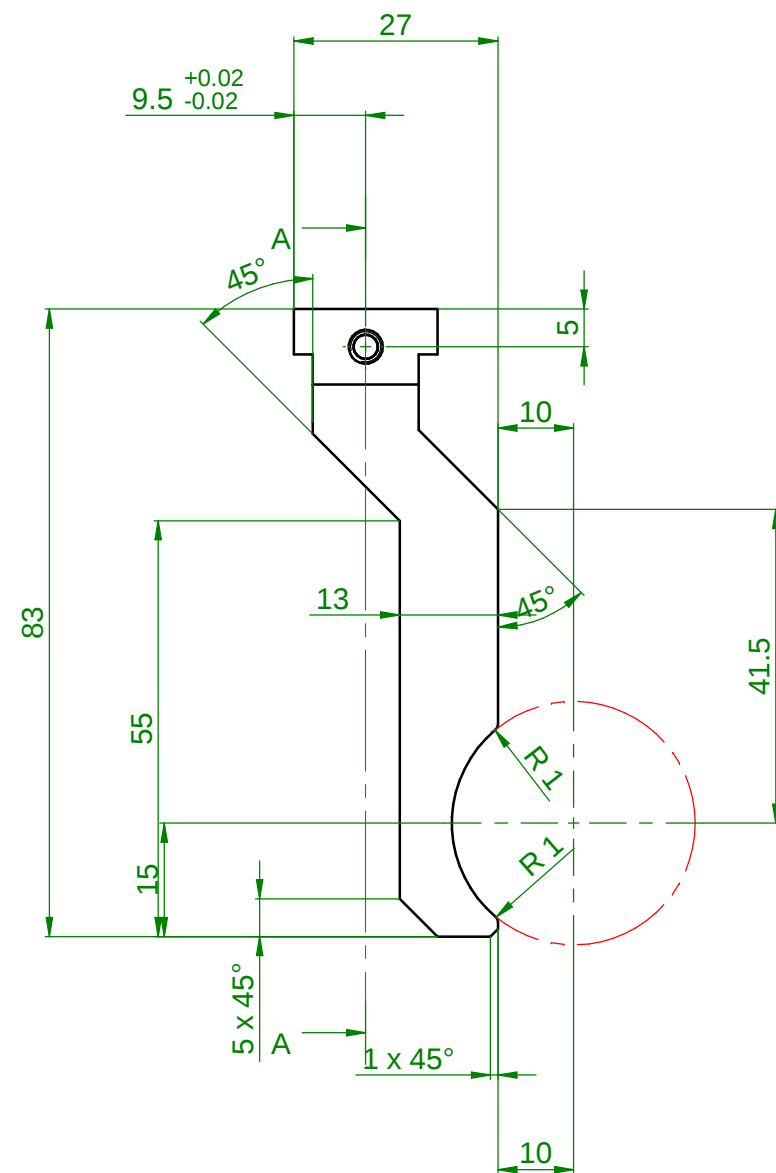


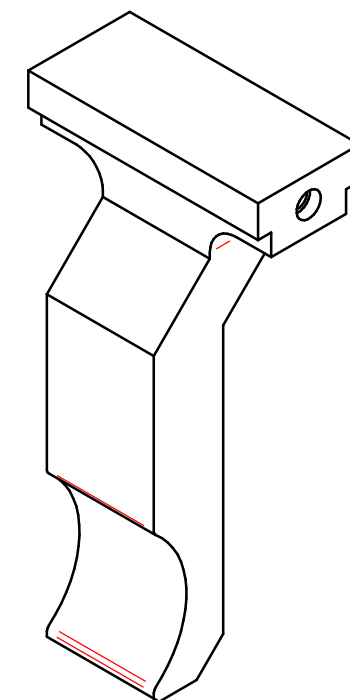

SEZIONE A-A

Ø 32.2 ^{+0.05}/₀
Quota diametrale da lavorare
con 2 particolari accoppiati
// 0.02/100 A B

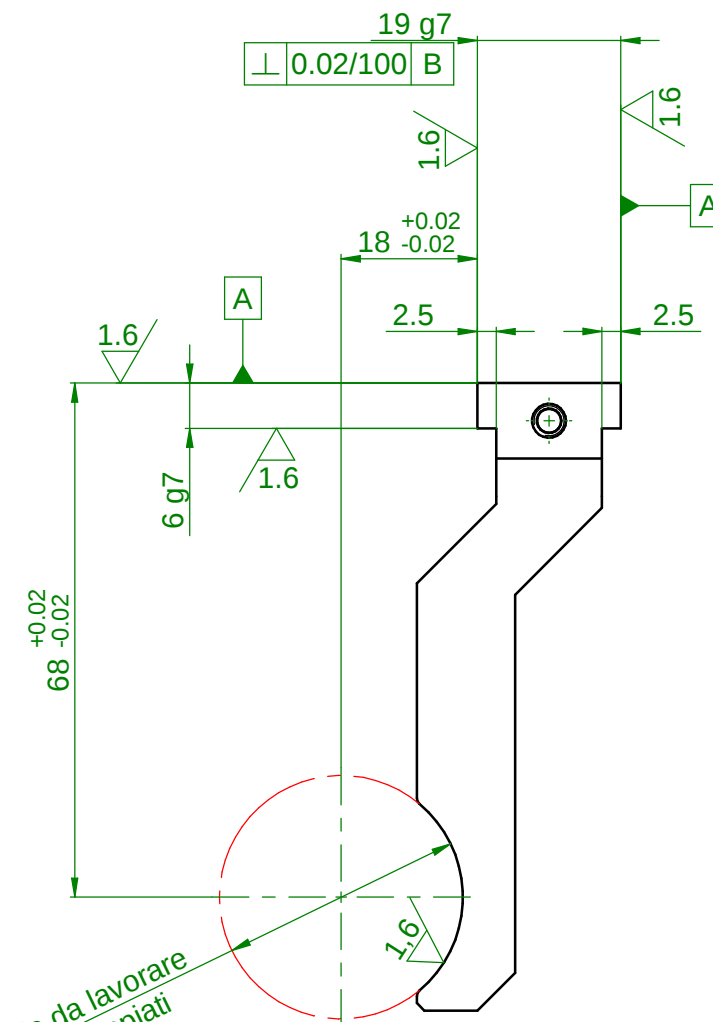

Smussare gli spigoli 0.5x45°

3.2 / (1.6 /)

.	.	.	.	.	Material: X 210 Cr 13 KU UNI2955	Name: GRIFFA CARICO/SCARICO Ø=32.2				
.	.	.	.	.						
.	.	.	.	.						
.	.	.	.	.						
REV	DATE	DESCRIPTION	DR	APP	Heat Treatment: TEMPRA S.V. + RINVENIMENTO HRC 56-58	Drw: MARCHI	Date: 05/10/21	Scale: 1:1	Mass: 0.188 kg	
Additive Finish:					Mod: MARCHI	Date: 05/10/21				
Model Filename: 0307946601.par Draw Filename: 0307946601.dft					Chk: -	Date: -	General tolerances for linear dimensions: UNI EN 22768/1-m General tolerances for form and position: UNI EN 22768/2-K	A3	03.079466.01	SHT: 1 OF: 1
Il presente documento contiene INFORMAZIONI CONFIDENZIALI di ATOP S.p.A., ai termini di legge ogni diritto è riservato. This document contains CONFIDENTIAL INFORMATION of ATOP S.p.A. All rights are reserved.										