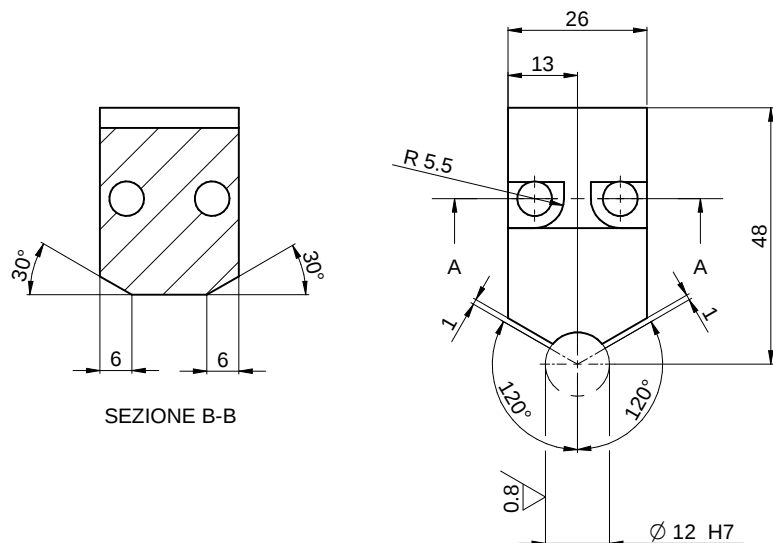


03.052470.01

ALTERNATIVE CODE NUMBER

SHT: 1 OF: 1

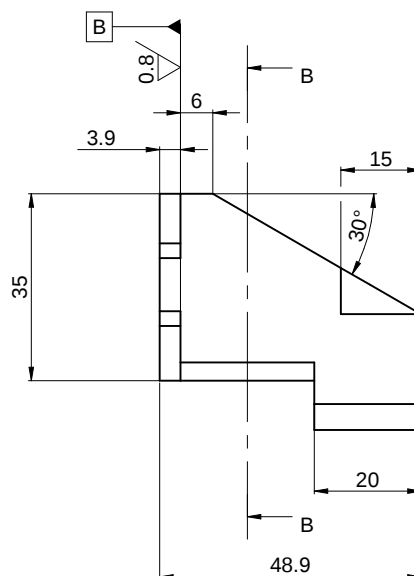
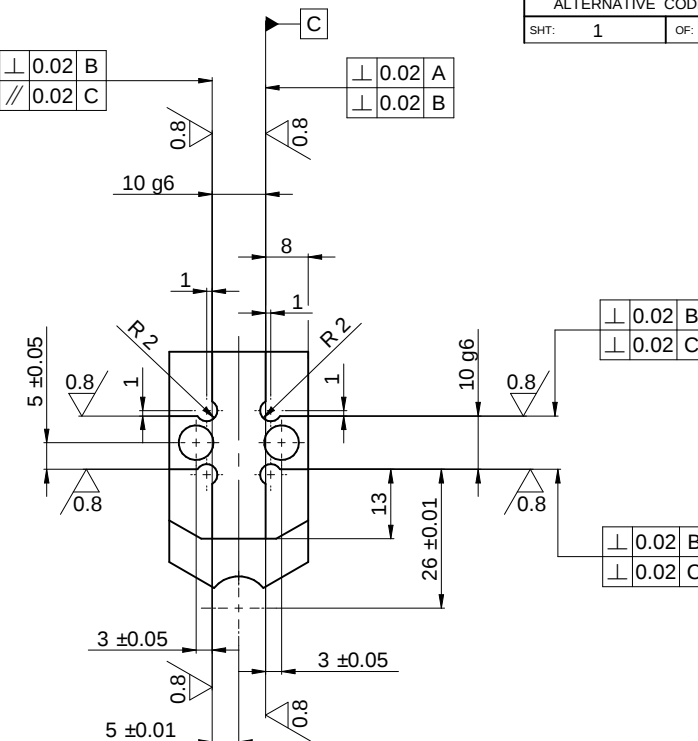
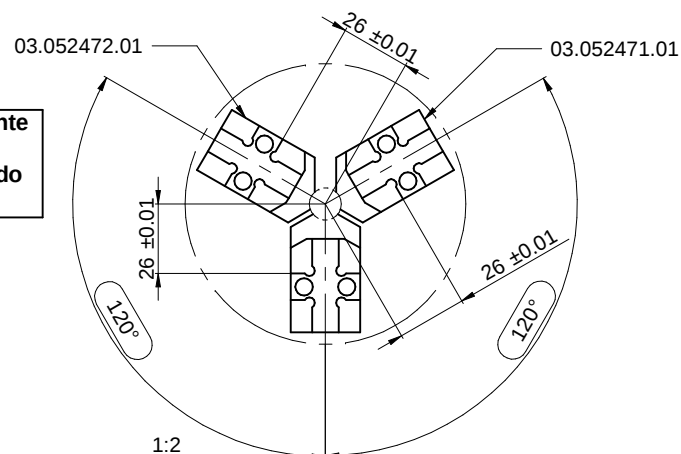
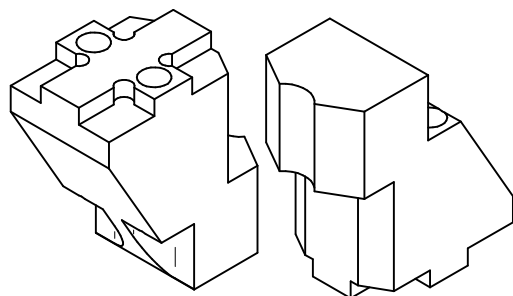
SEZ. A-A

 $\varnothing 6.5$
n°2 fori

SEZIONE B-B

 $\varnothing 12$ H7
 $\perp 0.02$ B
 $// 0.02$ C

Eseguire la lavorazione a $\varnothing 8$ H7 unitamente
ai particolari 03.052472.01 e 03.052471.01
posizionando le 3 griffe a 120° e rispettando
le tolleranze indicate

 $\perp 0.02$ B
 $// 0.02$ C $\perp 0.02$ A
 $\perp 0.02$ B $\perp 0.02$ B
 $\perp 0.02$ C $\perp 0.02$ B
 $\perp 0.02$ CSmussare gli spigoli vivi $0.5 \times 45^\circ$ $3.2 / (0.8 /)$ 

REV	DATE	DESCRIPTION	DR	APP	MATERIAL: X 215 Cr W 12 1 KU UNI 2955	NAME: GRIFFA FISSA INFERIORE $\varnothing 12$	MASS: 243 g	SCALE: 1 : 1	DR: MARCHI AP:	DATE: 05/03/14 DATE: -	03.052470.01	SHT: 1 OF: 1
PROPRIETÀ: ATOP A TERMINI DI LEGGE OGNI DIRITTO E' RISERVATO.					HEAT TREATMENT: TEMPRA SOTTOVUOTO E RINVENIMENTO / HRC 62-64	TOLL. GEN.: UNI 2768-mk	TOLL. ANG.: UNI 2768-m					