


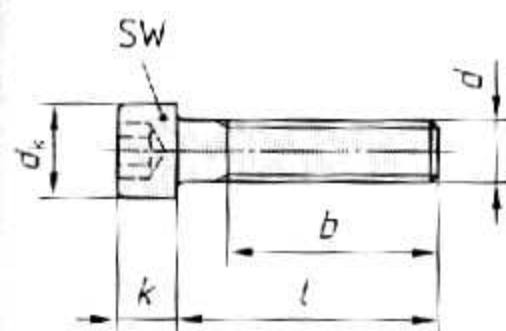

d	M1,5	M2	M2,5	M3	M4	M5	M6	M8	M10
SW	1,5	1,5	2	2,5	3	4	5	6	8
d_k	3	3,8	4,5	5,5	7	8,5	10	13	16
k	1,6	2	2,5	3	4	5	6	8	10
$b^{1)}$	15	16	17	18	20	22	24	28	32
für l	16	20	25	≥ 25	≥ 30	≥ 30	≥ 35	≥ 40	≥ 45
l von	2,5	3	4	5	6	8	10	12	16
bis	16	20	25	30	40	50	60	80	100
d	M12	M16	M20	M24	M30	M36	M42	M48	M56
SW	10	14	17	19	22	27	32	36	41
d_k	18	24	30	36	45	54	63	72	84
k	12	16	20	24	30	36	42	48	56
$b^{1)}$	36	44	52	60	72	84	96	108	124
für l	≥ 45	≥ 65	≥ 80	≥ 90	≥ 110	≥ 120	≥ 140	≥ 160	≥ 180
l von	20	25	30	35	40	45	60	70	80
bis	120	160	200	200	200	200	300	300	300
NL ²⁾	2,5, 3, 4, 5, 6, 8, 10, 12, 16, 20, 25, 30...65, 70, 80...150, 160, 180, 200...280, 300 mm								
⇒	Zylinderschraube ISO 4762 - M10 x 55 - 10.9 $d = M10, l = 55 \text{ mm}$, Festigkeitsklasse 10.9								

¹⁾ sonst Gewinde annähernd bis zum Kopf

²⁾ NL Nennlängen /