


4.8 / 5.8

**Cross recessed pan head
machine screws, steel
type H (Phillips)**

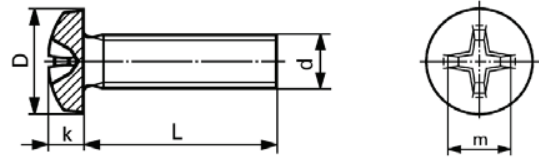

ISO 7045 / DIN 7985

Zinc plated

d	M 2		M2,5		M 3		M4	
D	4		5		6 ISO 5,6		8	
k	1,6		2 ISO 2,1		2,4		3,1	
m ≈	2,5		2,7		3,1		4,6	
driver size	1		1		1		2	
L quantity	100	1000+	100	1000+	100	1000+	100	1000+
4	4.-	2.30	4.-	2.-	4.-	2.20	8.90	6.50
5	4.-	2.30	4.-	2.10	4.-	2.20	5.-	3.80
6	4.-	2.90	4.-	2.10	4.-	2.20	4.50	2.90
8	4.-	2.90	4.-	2.20	4.-	2.20	4.50	2.90
10	4.-	3.-	4.-	2.30	4.-	2.30	4.50	2.90
12	4.50	3.10	4.-	2.50	4.-	2.40	4.70	3.10
14			5.-	3.-	4.50	2.50	6.-	4.10
16	5.-	3.20	4.50	2.75	4.50	2.50	5.-	3.50
18					5.-	3.20	7.20	4.80
20	5.50	4.-	5.-	3.40	4.50	3.-	7.-	4.50
22					5.-	3.80	8.60	6.30
25			5.50	3.90	5.-	3.90	6.-	4.25
30					6.20	4.-	7.20	5.-
35					7.10	5.30	8.30	5.90
40					11.60	8.40	9.10	6.40
45					13.-	10.20	10.20	7.10
50					14.50	11.70	14.10	10.40
55							18.50	14.90
60					19.70	16.80	17.10	13.60
70							25.-	19.80

+ 10% discount for 10 000 pieces per item

Type Z (Pozidriv) see page G 28