

Elektromagnet-Bremsen
0.6 – 3.6 Nm


Electromagnetic brakes
0.6 – 3.6 Nm

428374

"ASB"

Abmessungen Bremsen

Brake dimensions

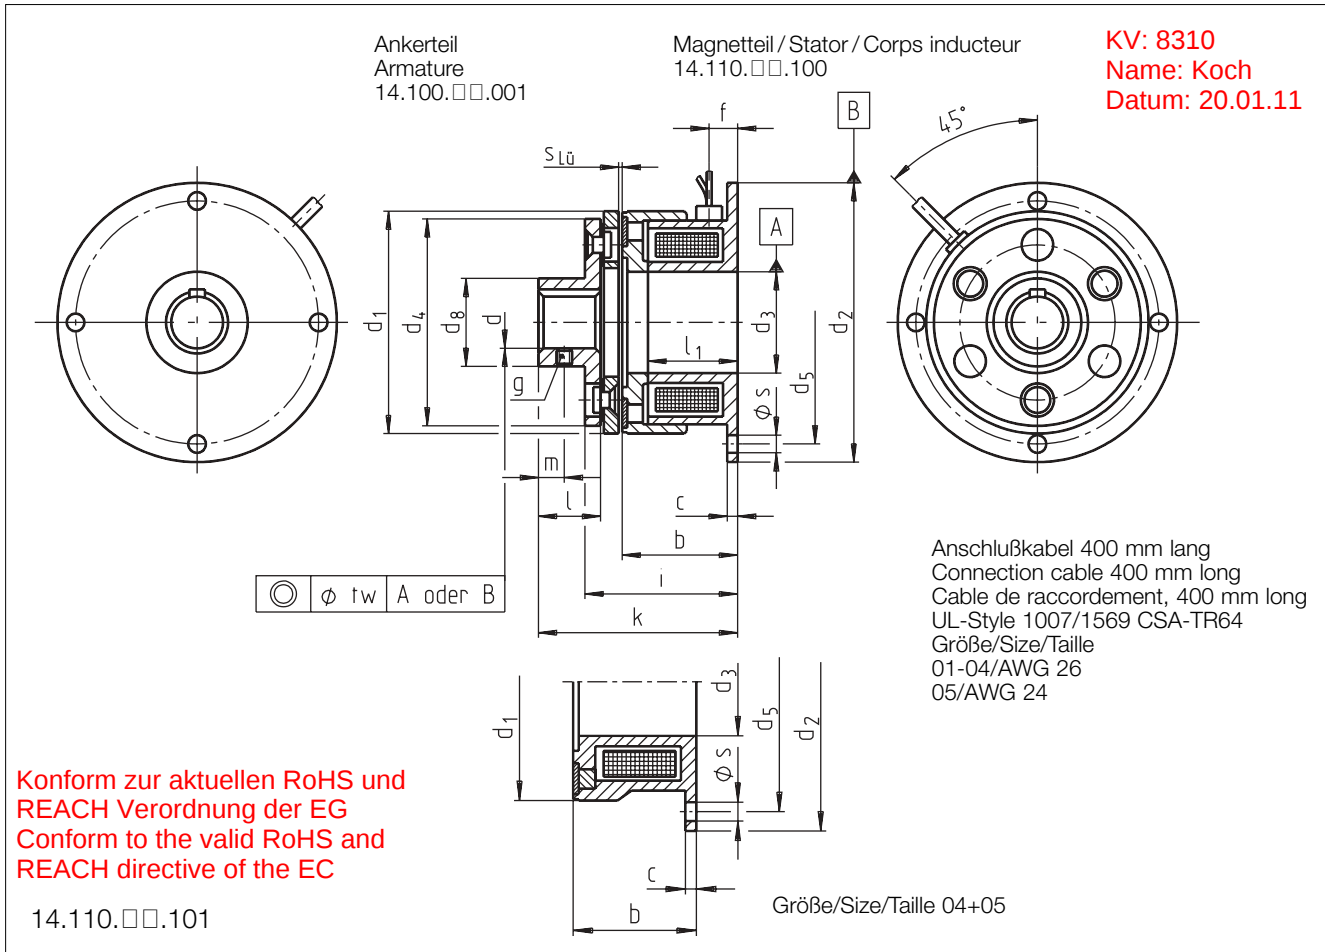

Größe Size Taille	M [Nm]	b	c	d H7 Standard			d ₁	d ₂ h9	d ₃ H8	d ₄	d ₅	d ₈	f	i	k	l ₁
02	0.6	16	1.5	5	6	8	31	39	11	28	33.5	13	4	20.35	26.35	12
03	0.9	19	2	5	6	8	34	45	13	32	38	15	4.5	23.55	31.55	14
04	2.2	22.3	2	6	8	10	43	54	19	40	47	17	5.5	28.4	37.4	17.3
05	4.5	23.5	2	10	12	15	54	65	26	50	58	24	5.5	29.7	38.7	18

Maße in mm
Paßfedernut nach DIN 6885/1 - P9
Empfohlene ISO-Passung für Wellen: k₆

Dimensions in mm
Keyway to DIN 6885/1-P9
Recommended ISO shaft tolerance: k₆

Cotes en mm
Rainure de clavette selon DIN 6885/1-P9
Tolérance ISO recommandée pour arbres : k₆

Größe Size Taille	l	m	s	S _{Lü}	t _w	g DIN 916	Magnetteil Stator Corps inducteur m [kg]	Ankerteil Armature Armature m [kg]	
								1	3
02	8	3.5	3.4	0.1	0.03	M3	0.054	0.015	0.009
03	10	4	3.4	0.15	0.03	M3	0.083	0.026	0.011
04	12	5	3.4	0.15	0.03	M3	0.140	0.037	0.023
05	12	5	3.4	0.2	0.03	M3	0.220	0.056	0.033

Maße in mm

Dimensions in mm

Cotes en mm