



Tol. Nr. 400228

TKM 40.749

■ Einbauempfehlungen, Bauform A und E

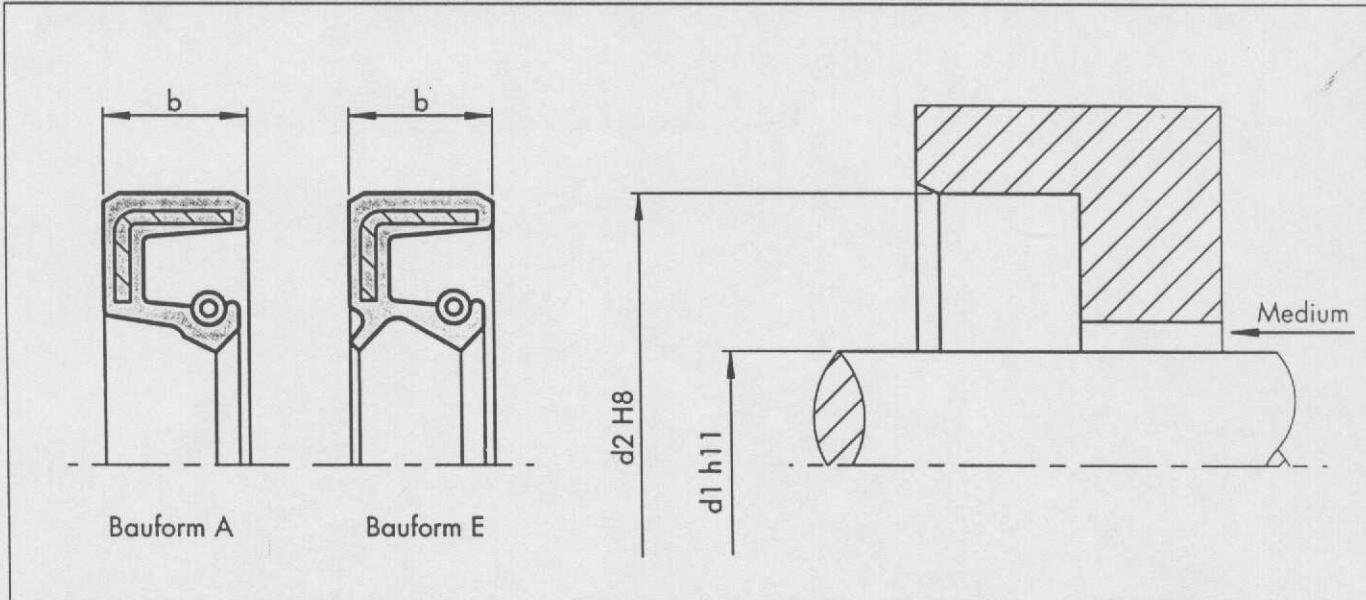


Bild 18 Einbauzeichnung

Tabelle VIII Vorzugsreihe / Abmessungen, Teil-Nummern

Abmessung			Teil-Nr.	Teil-Nr.
d <sub>1</sub>	d <sub>2</sub>	b	Bauform A	Bauform E
4,0	12,0	6,0	TRA100040	
5,0	15,0	6,0	TRA000050	
5,0	16,0	7,0	TRA100050	
5,0	22,0	8,0	TRA200050	
6,0	15,0	4,0	TRA000060	
6,0	16,0	5,0	TRA100060	
<b>6,0</b>	<b>16,0</b>	<b>7,0</b>	<b>TRA000060</b>	<b>TREA00060</b>
6,0	19,0	6,0	TRA200060	
<b>6,0</b>	<b>22,0</b>	<b>7,0</b>	<b>TRAB00060</b>	
7,0	16,0	7,0	TRA000070	
<b>7,0</b>	<b>22,0</b>	<b>7,0</b>	<b>TRA000070</b>	
<b>8,0</b>	<b>22,0</b>	<b>7,0</b>	<b>TRA000080</b>	
<b>8,0</b>	<b>24,0</b>	<b>7,0</b>	<b>TRAB00080</b>	
<b>9,0</b>	<b>22,0</b>	<b>7,0</b>	<b>TRA000090</b>	
X 10,0	16,0	4,0	TRA000100	
10,0	18,0	6,0	TRA300100	TRE100100
10,0	19,0	7,0	TRA400100	TRE200100
10,0	20,0	5,0		TRE300100

Die fettgedruckten Abmessungen entsprechen den Empfehlungen der DIN 3760, Entwurf März 1993.

Abmessung			Teil-Nr.	Teil-Nr.
d <sub>1</sub>	d <sub>2</sub>	b	Bauform A	Bauform E
<b>10,0</b>	<b>22,0</b>	<b>7,0</b>	<b>TRA00100</b>	<b>TREA00100</b>
10,0	24,0	7,0	TRAB00100	TREB00100
10,0	25,0	8,0	TRA500100	
<b>10,0</b>	<b>26,0</b>	<b>7,0</b>	<b>TRAC00100</b>	<b>TREC00100</b>
10,0	28,0	7,0	TRA600100	TRE400100
11,0	17,0	4,0	TRA00110	
11,0	19,0	7,0	TRA100110	
11,0	22,0	7,0	TRA00110	
11,0	26,0	7,0	TRAB00110	
12,0	19,0	5,0	TRA00120	TRE000120
12,0	20,0	5,0	TRA200120	
<b>12,0</b>	<b>22,0</b>	<b>7,0</b>	<b>TRA00120</b>	<b>TREA00120</b>
12,0	24,0	7,0	TRAB00120	TREB00120
<b>12,0</b>	<b>25,0</b>	<b>7,0</b>	<b>TRA00120</b>	<b>TREE00120</b>
12,0	28,0	7,0	TRAC00120	TREC00120
<b>12,0</b>	<b>30,0</b>	<b>7,0</b>	<b>TRAD00120</b>	<b>TRED00120</b>
12,0	30,0	10,0	TRA300120	
12,0	32,0	7,0	TRAH00120	TRE300120