
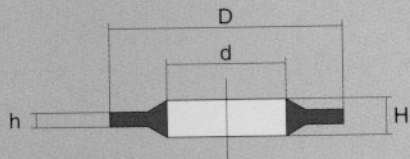


408315

KV5056



Bütle-Schraubensicherungs-, Dicht- und Unterlegringe

Aufnahmebohrung
(empfohlen)

ABMESSUNG	d	D	h	H	1*	2*
M 3	3.10	7.00	0.70	1.30	3.7	
M 4	4.15	9.00	1.25	2.80	4.8	
M 5	5.15	10.60	1.40	3.50	6.0	
M 6	6.10	12.00	1.60	4.20	7.0	
M 6 a	6.40	10.70	1.00	3.50		7.3
M 8	8.10	15.80	2.10	4.60	9.2	
M10	10.00	19.60	2.10	5.30	11.0	
M12	12.00	22.00	2.20	5.50	13.2	
M14	14.00	25.20	2.50	5.50	14.8	
M16	16.20	29.40	2.60	6.20	17.0	
M18	18.15	31.50	2.70	6.90	19.2	
M20	20.20	35.50	2.80	6.90	21.3	
M20 a	20.30	31.50	2.70	7.00		21.0
M22	22.50	36.00	2.50	6.00	23.3	
M24	24.30	37.80	3.00	7.90	25.2	
M27	27.30	40.00	3.10	7.90	28.1	
M30	30.20	49.20	3.20	9.30	31.0	
M33	33.20	50.10	3.40	9.50	34.2	
M36	36.40	64.70	3.80	11.80	37.2	
M39	39.50	69.20	3.80	10.70	40.0	

Standard: Polyamid, natur (schwarz, rot ... auf Anfrage) PE, PP, POM, PVDF ... auf Anfrage