


Online Product information

KAG-Identnummer 435699
KV48297, 17.11.21, Ra.

OR NBR 70

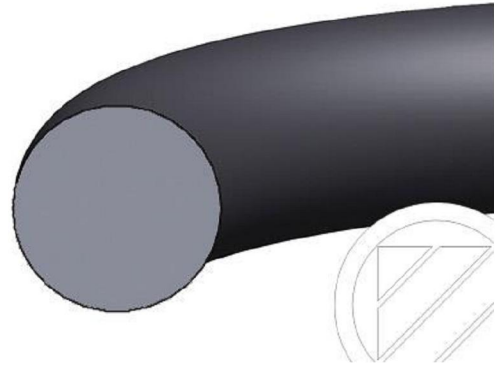

DESCRIPTION

Product group: OR O-rings

Material: NBR 70

Colour: NBR 70, black

Dimensional tolerances according to DIN ISO 3601-1, industry class B

Surface deviations according to DIN ISO 3601-3, type feature N

For specific applications the permitted dimensional tolerances can be restricted according to industry class A and the surface deviations to type feature S.

Materials with approvals and/or conformity tests for special applications (gas, drinking water, foodstuffs) are available, as required.

OPERATIONAL APPLICATION LIMITS

Temperature EPDM 70: -45 °C to +130 °C

Temperature FKM: -15 °C to +200 °C

Temperature HNBR 70: -30 °C to +150 °C

Temperature NBR: -30 °C to +100 °C

Temperature VMQ 70: -55 °C to +200 °C

FUNCTION

O-rings are closed circular rings of circular cross-section. They are made through vulcanisation from form tools as a complete ring. The sealing function of the O-ring is achieved by the deformation of the cross-section when installed and compressed in its housing. The O-ring can be compressed either radially or axially in its installation housing. In operating conditions the pressure exerted by the media reinforces the sealing function, as under pressure the elastomer material functions as a non-compressible fluid.

APPLICATIONS

O-rings are used predominantly for sealing non-moving machine and system components (static application) and media in liquid and gas form, e.g. flange and cover seals, threaded tube connections and the cylinder head and cylinder bottom for hydraulic cylinders. Under certain conditions it is also possible to use O-rings with reciprocating, rotating and helical movements (dynamic application). If the installation housing is finished properly, the construction design is right and the proper materials are selected, it is possible for pressures of up to 1000 bar to be sealed, with the use of back-up rings, where required. O-rings are used in many sectors, such as the fields of hydraulics, pneumatics, vacuum applications, the fittings industry, the automotive industry and in plant and mechanical engineering.

INSTALLATION HOUSINGS

The installation housings (grooves) for O-rings should if possible be produced with right angles and should be processed with care. Burrs, scratches and notches should be avoided. The dimensions for the required depth and width of the groove depend on the particular application and cross-section. You will find recommendations for construction and dimension tables in our O-Ring Catalogue. To facilitate installation, a variety of surface coatings can be supplied on application.

SELECTION AND DESIGN

To ensure sound sealing effect, O-rings should be selected to offer the largest possible cross-section. The hardness of the O-ring material selected depends on the pressure, gap widths, type of sealing (static/dynamic) and the surface quality of the machine parts. For standard applications we recommend a material hardness of 70 Shore A. Careful consideration should also be given to the correct compression, elongation or compaction and the degree to which the groove in the installation housing is filled.

SUITABILITY FOR SPECIFIC MEDIA

EPDM

Good resistance to hot water and steam, detergents, caustic potash solutions, silicone oil and greases, many polar solvents, and many diluted acids and chemicals, along with a high level of ozone resistance. EPDM materials are totally unsuitable for use with all mineral oil products (lubricants, fuels).

FKM

Good chemical resistance to mineral oils and greases, synthetic oils and greases, engine, transmission and ATF oils to approx. +150°C, fuels, non-flammable hydraulic pressure fluids HFD, aliphatic, aromatic and chlorinated hydrocarbons, water to max. +80°C, excellent resistance to weathering, ozone and ageing, very low gas permeability (and therefore excellent for vacuum application) and resistance to a wide range of chemicals.

HNBR

HNBR is obtained by fully or partially hydrogenating NBR. It leads to considerable improvement in resistance to heat, ozone and ageing, and gives it very good mechanical properties, e.g. good resistance to wear. The media resistance compares to that of NBR. HNBR has a good resistance to some refrigerants. The temperature application range is from -30°C to +150°C.

NBR

Good chemical resistance to mineral oils and greases, hydraulic oils H, HL, HLP, non-inflammable hydraulic pressure fluids HFA, HFB, HFC to approx. +50°C and water to max. +80°C..


VMQ

Good resistance to water (up to 100 °C), aliphatic engine and transmission oils, animal and plant oils and fats. VMQ is generally not resistant to fuels, aromatic mineral oils, steam (short term up to 120 °C possible), silicone oils and greases, acids and alkaline compounds.

INSTALLATION

Avoid damaging the O-ring during installation, as this will cause leakage. Observe the following:

- The O-ring must not be expanded to its elongation limit
- Edges must be burr-free, radii and angles applied smoothly
- Dust, dirt, metal chips and other particles must be removed
- Tips of screws and installation housings for other sealing and guiding elements should be covered by an assembly sleeve
- A suitable grease to be applied to the assembly surfaces and O-rings
- Elastomer materials are made smoother if they are heated in oil or hot water to approx. 80 °C. This makes it easier to stretch the O-ring for assembly
- Any assembly tools used, such as expansion mandrels or sleeves, should be made of a soft material (e.g. POM) and not have any sharp edges
- The O-ring should not be rolled over assembly surfaces. Ensure the O-ring is not twisted as it slots into the groove

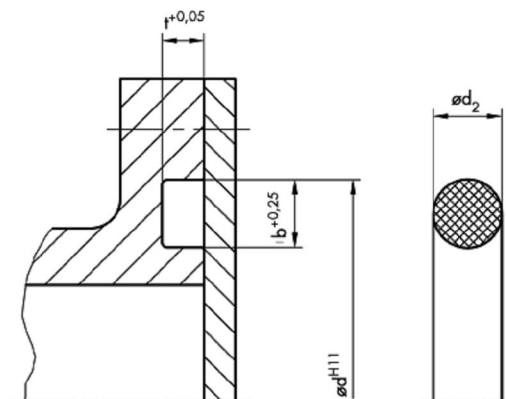

Technisches Datenblatt nach ASTM

Werkstoff

NBR NB707101

schwarz

Vernetzung: Schwefel

Änderungsindex Änderungsdatum
 4 24.10.2019

Seite 1 / 3

Allgemeine Prüfungen

	Sollbereich	Typ. Werte	
Dichte ASTM D 1817	1.23 ±0.02	1.23	g/cm ³
Härte ASTM D2240, Shore A	70 ±5	67	Shore
Zugfestigkeit ASTM D412	---	17,5	MPa
Reißdehnung ASTM D412	---	325	%
Kältetest ASTM D1329, TR10	---	-27,1	°C
Kältebeständigkeit ASTM D 2137, 3 min, Methode C, Nonbrittle; pass	---	-35	
Druckverformungsrest ASTM D395, B, 22 h, 100 °C, 25 %	---	8	%

Übersicht der Freigaben

Land	Bauteil	Bemerkung	Gültig bis	unbegrenzt
ADI Frei		siehe Zertifikat		☒
RoHS Konform		inklusive EU 2011/65 und EU2015/863 (ROHS III)		☒

Änderung nach Alterung: in ASTM-Öl Nr. 1: 70h/100°C

		Anlieferwert	Nach Lagerung	Änderungen
Härte (ASTM D2240, Shore A)	Shore	67	76	9
Zugfestigkeit (ASTM D412)	MPa	17,5	17,9	2 %
Reißdehnung (ASTM D412)	%	325	279	-14 %
Volumenänderung (ASTM D471)	%		-9,5	

Freudenberg

 Freudenberg Industrial Services GmbH
 Global Material Technology
 Nadja Güldner

 Telefon: +49 6201 80 2182
 Fax: -
 Email: nadja.gueldner@fst.com


Technisches Datenblatt nach ASTM

Werkstoff

NBR NB707101

schwarz

Vernetzung: Schwefel

Änderungsindex

4

Änderungsdatum

24.10.2019

Seite 2 / 3

Änderung nach Alterung: in ASTM-Öl Nr. 3: 70h/100°C

Härte (ASTM D2240, Shore A)
 Zugfestigkeit (ASTM D412)
 Reißdehnung (ASTM D412)
 Volumenänderung (ASTM D471)

Shore
 MPa
 %
 %

Anlieferwert	Ist-Werte	
	Nach Lagerung	Änderungen
67	70	3
17.5	17.7	1 %
325	286	-12 %
	1.6	

Änderung nach Alterung: in Luft: 70h/100°C

Härte (ASTM D2240, Shore A)
 Zugfestigkeit (ASTM D412)
 Reißdehnung (ASTM D412)
 Volumenänderung (ASTM D471)

Shore
 MPa
 %
 %

Anlieferwert	Ist-Werte	
	Nach Lagerung	Änderungen
67	71	4
17.5	17.1	-2 %
325	276	-15 %
	-0.4	

Freudenberg

Freudenberg Industrial Services GmbH
 Global Material Technology
 Nadja Güldner

Telefon: +49 6201 80 2182
 Fax: -
 Email: nadja.gueldner@fst.com



Technisches Datenblatt nach ASTM

Werkstoff **NBR NB707101**

schwarz

Vernetzung: Schwefel

Änderungsindex

4

Änderungsdatum

24.10.2019

Seite

3 / 3

Keine ASTM D2000 Prüfungen verfügbar

Die angegebenen Werte stützen sich auf eine begrenzte Anzahl von Prüfungen an Normprüfkörpern (2mm Musterplatten). Die an Fertigteilen ermittelten Daten können in Abhängigkeit des Fertigungsverfahrens und der Teilegeometrie von obigen Werten abweichen.

Die vorstehenden Angaben stellen unsere gegenwärtigen Erfahrungswerte dar. Es obliegt dem Besteller, vor Verwendung des Produktes selbst zu prüfen, ob es sich, auch im Hinblick auf mögliche anwendungswirksame Einflüsse, für den von ihm vorgesehenen Verwendungszweck eignet. Alle Fragen einer Gewährleistung und Haftung für dieses Produkt regeln sich nach unseren Allgemeinen Verkaufsbedingungen, sofern nicht gesetzliche Vorschriften etwas anderes vorsehen.

Freudenberg

Freudenberg Industrial Services GmbH
Global Material Technology
Nadja Güldner

Telefon: +49 6201 80 2182
Fax: -
Email: nadja.gueldner@fst.com

