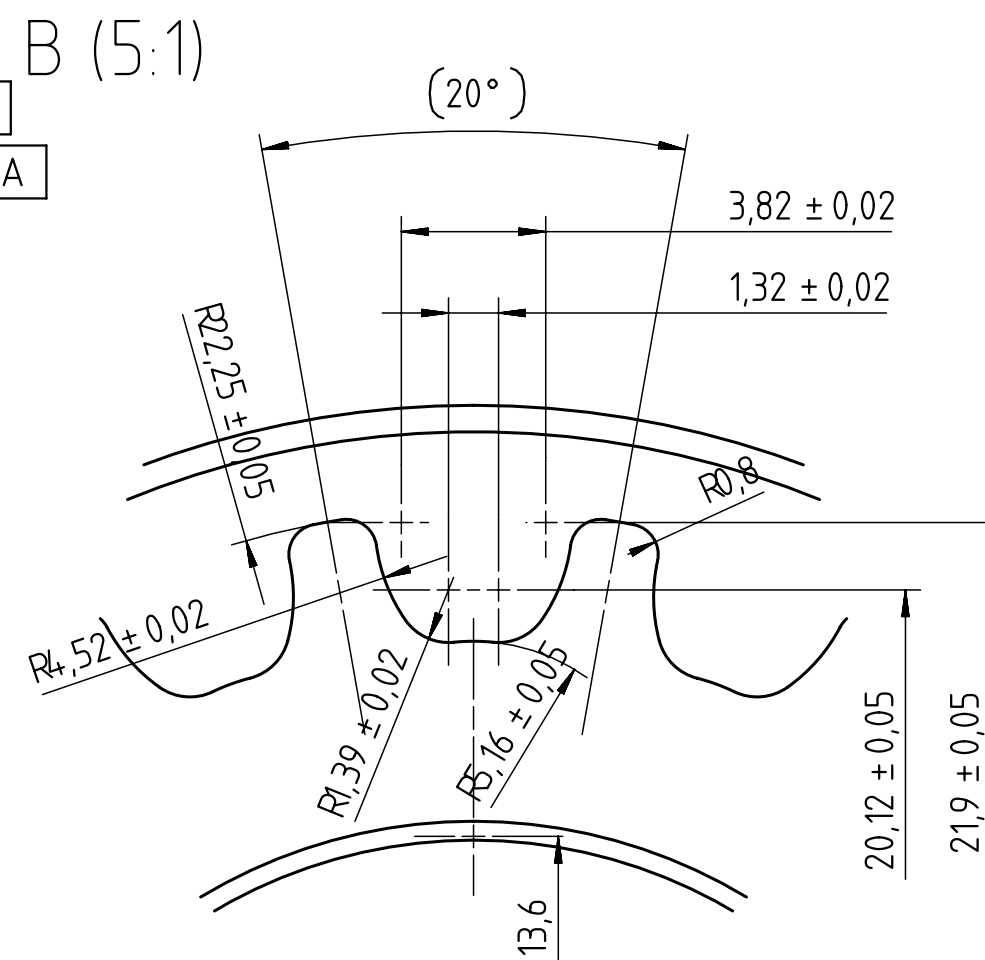
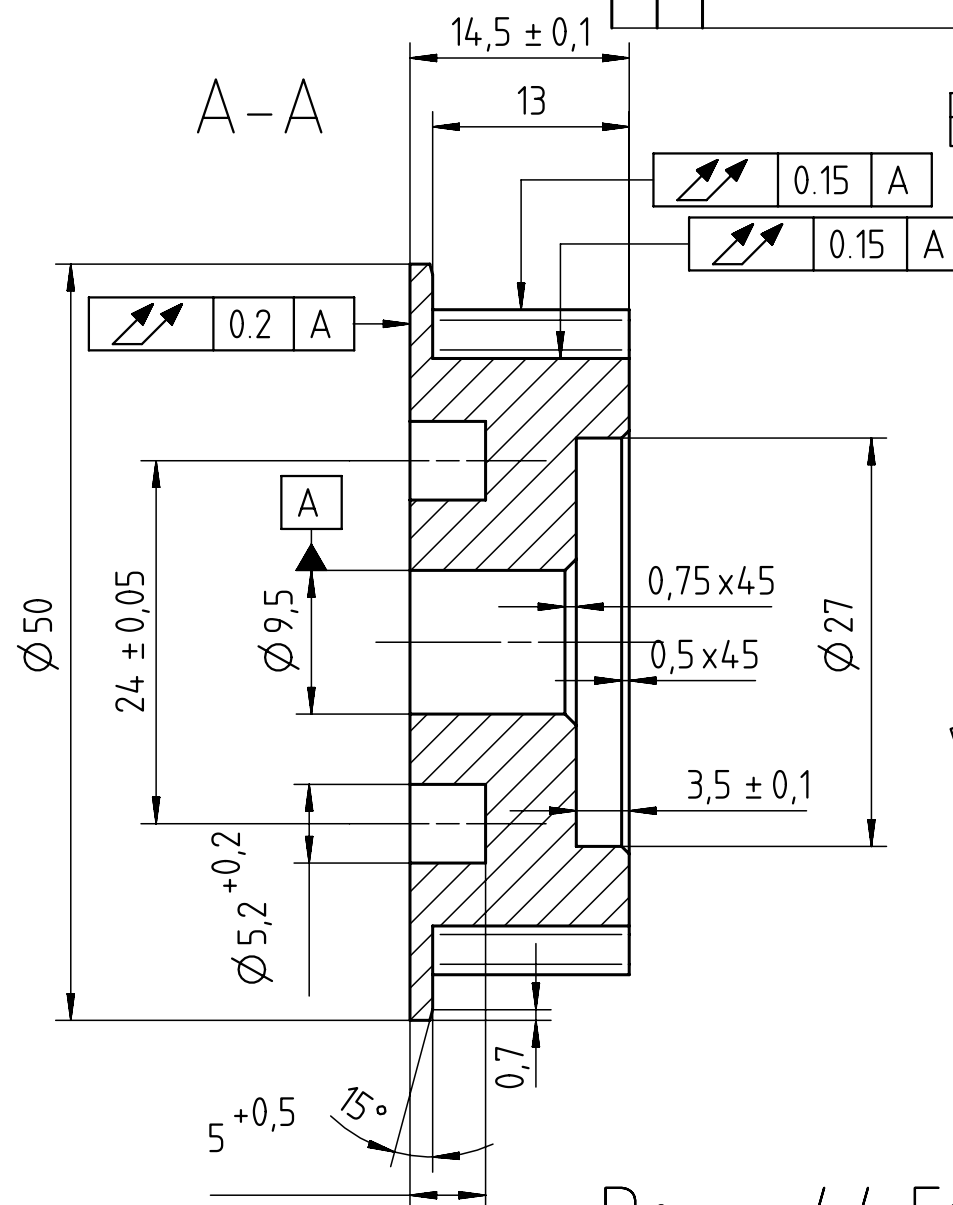




This document and the information given in connection with said document, in so far it is based on KAG-authorship, are and remain the property of KAG. This document and all information is confidential. The user is not allowed to disclose it to third parties without having the prior written consent of KAG. All rights, especially with regard to inventions are reserved by KAG.


$$De = 44.5\text{mm}; \quad z=18$$

Werkstückkanten PART EDGES DIN ISO 13715 ohne Angabe: NOT SPECIFIED:			Allgemeintoleranzen/GENERAL TOLERANCES Länge und Winkel LENGTH AND ANGLE DIN ISO 2768-1 mittel		Form und Lage FORM AND POSITION DIN ISO 2768-2 mittel		Nennmassbereich/RANGE OF NOMINAL SIZE Abmasse/DEVIATIONS											
							über/OVER		0.5	3	6	30	120	400	1000	2000		
							bis/UP TO		3	6	30	120	400	100	2000	4000		
									± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2.0		
	Theoretisches Mass/THEORETICAL DIMENSION		DIN ISO 1101		Methode 1 FIRST ANGLE PROJECTION		Gewicht/Wt. [kg]		Masstab/SCALE 2:1			Vorlagezeichng.						
	Oberflächenbeschaffenheit/SURFACE QUALITY		DIN ISO 1302									GDZnAl4Cu1 DIN 1743						
	Toleranz für Kunststoffeile/TOLERANCE FOR PLASTIC PARTS																	
	Prüfmasß/ CONTROLLING DIMENSION				Name		Datum		Benennung/PART NAME									
(/)	Hilfsmasß/ AUXILIARY DIMENSION		DIN 406 Teil 2		bearb.		Ra		2.2.07		Riemenrad, z=18, Gussvorteil (Pulley)							
[]	Rohmasß/UNFINISHED DIMENSION		DIN 406 PART 2		gepr.													
 Alles außer Stillstand.							KV-Nr.: 5445											
					Zeichnungsstatus/STATUS						Zeichnungsnummer				Index		Blatt	
					Serie / production						408596						1	