


Elektromagnetbremsen  
0,6 – 4,5 Nm

Electromagnetic brakes  
0.6 – 4.5 Nm

**KAG-ID: 435851a**  
**KV70754**  
**16.12.21 SA**

Typ / Type 14.110.--.101

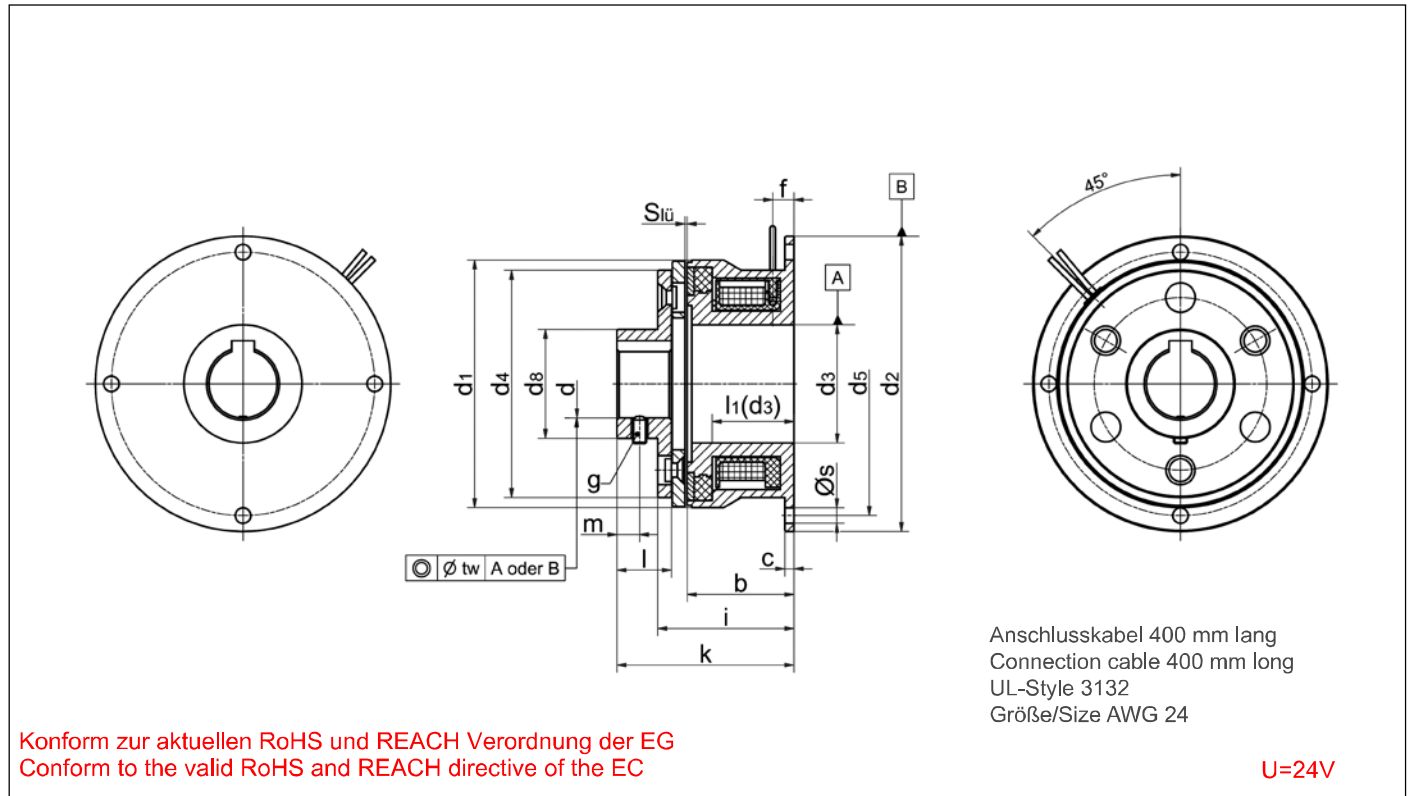

| Größe<br>Size | M<br>[Nm] | b    | c   | d H7<br>Standard |    |    | d <sub>1</sub> | d <sub>2</sub> | d <sub>3</sub> | d <sub>4</sub> | d <sub>5</sub> | d <sub>6</sub> | f   | i     | k     | l <sub>1</sub> |
|---------------|-----------|------|-----|------------------|----|----|----------------|----------------|----------------|----------------|----------------|----------------|-----|-------|-------|----------------|
| 02            | 0.6       | 16   | 1.5 | 5                | 6  | 8  | 31             | 39             | 11             | 28             | 33.5           | 13             | 4   | 20.35 | 26.35 | 10             |
| 03            | 0.9       | 19   | 2   | 5                | 6  | 8  | 34             | 45             | 13             | 32             | 38             | 15             | 4.5 | 23.55 | 31.55 | 12             |
| 04            | 2.2       | 22.3 | 2   | 6                | 8  | 10 | 43.5           | 54             | 19             | 40             | 47             | 17             | 5.5 | 28.4  | 37.4  | 15             |
| 05            | 4.5       | 23.5 | 2   | 10               | 12 | 15 | 54.5           | 65             | 26             | 50             | 58             | 24             | 5.5 | 29.7  | 38.7  | 16             |

| Größe<br>Size | l  | m   | s   | S <sub>LÜ</sub> | t <sub>w</sub> | g       | Magnetteil<br>Stator | Ankerteil<br>Armature |
|---------------|----|-----|-----|-----------------|----------------|---------|----------------------|-----------------------|
|               |    |     |     |                 |                | DIN 916 | m [kg]               | m [kg]                |
| 02            | 8  | 3.5 | 3.4 | 0.1             | 0.03           | M3      | 0.054                | 0.015                 |
| 03            | 10 | 4   | 3.4 | 0.15            | 0.03           | M3      | 0.083                | 0.026                 |
| 04            | 12 | 5   | 3.4 | 0.15            | 0.03           | M3      | 0.132                | 0.037                 |
| 05            | 12 | 5   | 3.4 | 0.2             | 0.03           | M3      | 0.211                | 0.056                 |

Maße in mm  
Passfedernut nach DIN 6885/1-P9

Passfedernut in JS9  
für "leichten Sitz"

Gewinde ist M4.  
Gewindestchift ist nicht im  
Lieferumfang enthalten