


AMP SUPERSEAL 1.5 Series Connectors
1.5 mm Receptacle Contacts

1.5 mm Receptacle Contacts



Technical Features

- Contact Finish:**
Tin plated
- Current Carrying Capacity:**
14 A max.
- Wire Size Range:**
0.35 – 2.5 mm²
- Insulation Diameter:**
1.2 – 3.3 mm FLR
- Extraction Tool:**
Part No. 9-1579007-1
- Product Specification:**
108-20090
- Application Specification:**
114-20045

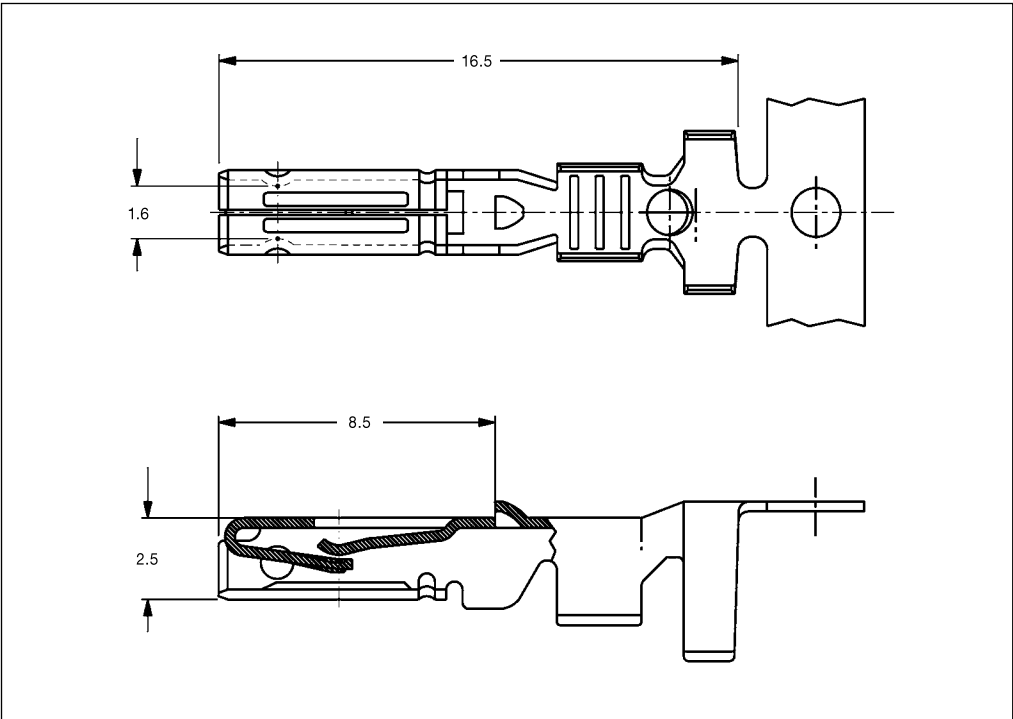

1.5 mm Receptacle Contacts

Wire Size Range (mm ²)	Insulation Diameter (mm)		Material and Finish	Strip Form	Part Numbers	
	FLK	FLR			Applicator	Hand Tool
0.35 – 0.50	1.45 – 2.20	1.2 – 1.6	CuSn, tin plated	282403-1	2151734-2 / 2266249-2 *)	Hand Tool Frame 539635-1 Die-Set 539773-2
0.75 – 1.50	2.40 – 3.35	1.7 – 2.4		282110-1	2151205-2 / 2266053-2 *)	58583-1
1.50 – 2.50	3.15 – 3.80	2.2 – 3.3		282466-1	2151856-2	–

*) Use in Stripper Seal Crimp Terminator

AMP Steckhülse
282110-1

KAG-Art.: 434930
KV46649, 16.07.18 SA